

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)

PCT

(10) International Publication Number
WO 2004/012617 A2

(51) International Patent Classification⁷: **A61B 19/00**
(21) International Application Number:
PCT/US2003/023770

(22) International Filing Date: 30 July 2003 (30.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/400,562 2 August 2002 (02.08.2002) US

(71) Applicant: **SDGI HOLDINGS, INC.** [US/US]; 300
Delaware Avenue Suite 508, Wilmington, DE 19801 (US).

(72) Inventors: **BRANCH, Charles, L.**; 177 Plantation Lan2,
P. O. Box 320, Advance, NC 27006 (US). **SMITH, Mau-
rice, M.**; 9285 Oak Knoll Cove, Cordova, TN 38018 (US).
FOLEY, Kevin, T.; 2877 Keasler Circle West, German-
town, TN 38139 (US). **ROEHM, Thomas, E. II**; P.O. Box
1372, Braden, TN 38010 (US).

(74) Agents: **WARMBOLD, David, A.** et al.; MS LC340, 710
Medtronic Parkway NE, Minneapolis, MN 55432 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: **SYSTEMS AND TECHNIQUES FOR ILLUMINATING A SURGICAL SPACE**

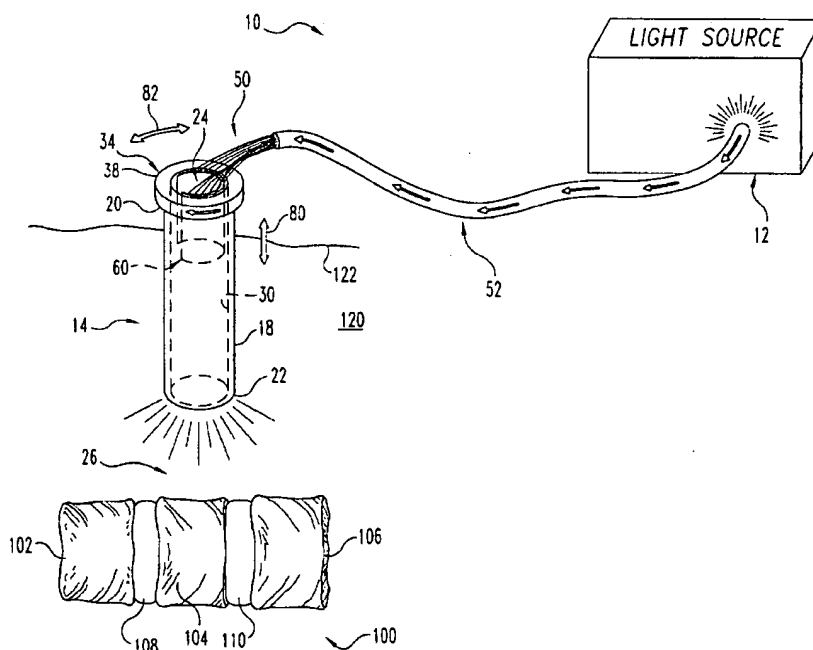

(57) Abstract: Methods and devices for illuminating a surgical space during surgery in a patient are provided. A retractor provides a working path for access to a location in the patient. A light instrument is positionable in working channel to emit light at the surgical space without substantially obstructing access to the surgical space.

SYSTEMS AND TECHNIQUES FOR ILLUMINATING A SURGICAL SPACE

Cross-Reference to Related Application:

This application claims the benefit of the filing date of Provisional Application Serial No. 60/400,562 filed on August 2, 2002.

BACKGROUND

A surgical space in a patient can require illumination for the surgeon to properly perform surgical procedures in the surgical space. In minimally invasive procedures, a second portal can be provided so that a light can be positioned at the surgical space through the second portal. A light could be inserted through the same portal used by the surgeon to access the space. Also, a light could be located above the portal.

The use of such lights has several drawbacks. For example, the use of a second portal increases the invasiveness of the procedure. Positioning a light instrument through a common access portal occupies space along the working channel, making it more difficult for the surgeon to maneuver instruments in the surgical space working channel, or requiring an increase in the size of the portal and thus increasing the invasiveness of the procedure. Also, the light may be secured to the portal during the procedure, which can obstruct access to or visualization of the surgical space through the portal.

It would be desirable to provide illumination of a surgical space in a minimally invasive surgical procedure while avoiding any one or combination of the aforementioned drawbacks. The present invention is directed to meeting this need, among others.

SUMMARY

According to one aspect, a system includes a retractor and a light instrument positionable in the working channel of the retractor, wherein the light instrument is supported in the working channel by engagement with an inner wall surface of the retractor.

According to another aspect, a system includes a retractor coupled to a light instrument. The light instrument is deformable to assume any one of a number of configurations for positioning in the retractor working channel in contact with the inner wall surface thereof.

According to another aspect, a system includes a retractor coupled to a light instrument. The light instrument is engageable with an inner wall surface of the retractor working channel and movable along the inner wall surface in contact therewith to reposition the light instrument relative to the retractor.

According to another aspect, a system includes a retractor and a light instrument engageable to the retractor in the working channel. The light instrument includes a semi-circular body and a plurality of light transmitting elements spaced about a distal end thereof.

According to one aspect, a system includes a retractor and a light instrument positionable in the working channel of the retractor with a plurality of light transmitting elements spaced about the retractor working channel adjacent the inner wall surface.

These and other aspects, forms, features, objects, and advantages will also be apparent from the following description of the illustrated embodiments.

BRIEF DESCRIPTION OF THE FIGURES

Fig. 1 is a perspective view of a retractor and light delivery system.

Fig. 2 is a perspective view of a light instrument comprising a portion of the system of Fig. 1.

Fig. 3 is an end view of the light instrument of Fig. 2.

Fig. 4 is a sectional view through a retractor having the light instrument of Fig. 2 engaged thereto.

DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

For the purposes of promoting an understanding of the principles of the invention, reference will now be made to the embodiments illustrated in the drawings and specific language will be used to describe the same. It will nevertheless be understood that no limitation of the scope of the invention is thereby intended, such alterations and further modifications in the illustrated devices and described methods, and such further applications of the principles of the invention as illustrated therein being contemplated as would normally occur to one skilled in the art to which the invention relates.

The present invention provides instruments and methods for performing surgery, including minimally invasive surgery, in spinal applications such as laminotomy, laminectomy, foramenotomy, facetectomy, discectomy, positioning of interbody implants,

positioning of intrabody implants, bone cutting and removal, tissue cutting and removal, and nerve root and tissue retraction, for example. Although the use of multiple portals is not precluded, also contemplated is the use of a single portal within the patient to perform surgical procedures. Systems and methods for providing light to the surgical space accessed by the surgeon through the portal are provided.

Referring to Fig. 1, there is shown a surgical system 10 that includes a light source 12 and a light instrument 50 coupled thereto. Light source 12 provides light through light instrument 50 to a retractor 14. The light is transmitted from light source 12 and into retractor 14, where it is emitted from light instrument 50 to illuminate the surgical space, including the working channel along retractor 14 and/or the working space adjacent the distal end of retractor 14. It is contemplated that body 18 can be made from light transmittable material such as glass or plastic, or an opaque material that does not transmit light.

Retractor 14 includes a body 18 extending between a proximal end 20 and a distal end 22. Body 18 can define a working channel 24 therethrough extending between and opening at proximal end 20 and distal end 22. Proximal coupling portion 34 can include a ring portion 38 extending about the proximal end of retractor 14. Working channel 24 can be sized to receive one or more surgical instruments therethrough to perform surgical procedures at working space 26 adjacent distal end 22 of retractor 14.

Retractor 14 can be inserted over the last of one or more tissue dilators and/or guidewires sequentially positioned one around the other to gradually retract tissue 120 and skin 122 of the patient. With retractor 14 positioned through the skin and tissue, the dilators are removed to provide access to working space 26 through working channel 24. In the illustrated embodiment, working space 26 is adjacent the spinal column segment 100. Working space 26 can include, for example, paraspinous tissue; the bony tissue of one or more of the vertebrae 102, 104, 106; the annulus tissue of disc space 108 between vertebrae 102, 104 and/or disc space 110 between vertebrae 104, 106; and/or a void created by manipulating tissue.

As further shown in Fig. 2, light instrument 50 includes a link 52 that can be coupled to light source 12 with coupling assembly 53. At the opposite end of link 52 is a lighting element 60 positionable in working channel 24 of retractor 14. Coupling assembly 53 can include an end member 54 coupled to the end of link 52 and through

which one or more light transmitting elements extend. A fitting 56 can be engaged to end member 54, and a light source connector 58 positioned over fitting 56 and secured to end member 54. Light source connector 58 is engageable to light source 12 so that light from light source 12 can be directed into light transmitting elements housed by link 52. It is also contemplated that coupling assembly 53 could include any other configuration suitable for securing link 52 to light source 12 such that light can be transmitted from light source 12 through link 52.

Fig. 3 provides a distal end view of lighting element 60 and Fig. 4 provides a cross-section through retractor 14 and looking proximally at lighting element 60 of light instrument 50 positioned therein. Lighting element 60 includes a body having an inner wall member 62 and an outer wall member 64. A passage 68 is formed between inner wall member 62 and outer wall member 64. Inner wall member 62 and outer wall member 64 can be coupled to one another at their lateral edges 74, 76 while passage 68 includes a plurality of light transmitting elements 66 therein.

Light transmitting elements 66 extend from link 52 adjacent proximal end 70 of lighting element 60 and fan out into passage 68 as shown in Fig. 1. Light transmitting elements 66 are configured relative to lighting element 60 in a manner that spaces transmitting elements 66 along passage 68 adjacent distal end 72. Passage 68 is open along at least a portion of distal end 72 to expose the distal ends of light transmitting elements 66 to the surgical space. Light transmitting elements 66 emit light from their distal ends to illuminate the surgical space. Since light transmitting elements 66 are distributed along inner wall surface 30 of retractor 14, the light emitted from the ends of light transmitting elements 66 provides effective illumination of the working space 26, and obscuring or shadowing of light by surgical instruments in working channel 24 is minimized or eliminated.

Body 18 of retractor 14 includes an inner wall surface 30 and an outer wall surface 32. Lighting element 60 is positioned in working channel 24 such that outer wall member 64 is positioned adjacent inner wall surface 30. The distal ends of light transmitting elements 66 can be dispersed at least partially around the inner wall surface 30 of body 18 to provide greater illumination of the surgical space and vary directions of emitted light. In one embodiment, light transmitting elements 66 extend around 50 percent or more of the inner perimeter of retractor body 18. In one form, light transmitting

elements 66 are spaced along about 50 percent to about 75 percent of the inner perimeter of retractor 18 formed by inner wall surface 30. Other embodiments contemplated arrangements for light transmitting elements 68 that extend from about 1 percent to about 100 percent of the inner perimeter of retractor body 18, from about 25 percent to about 75 percent of the inner perimeter of retractor body 18, and from about 40 percent to 60 percent of the inner perimeter retractor body 18.

Lighting element 60 can be deformable or manipulated to various configurations by moving the lateral edges 74, 76 as indicated by arrows 78. In this manner, lighting element 60 can be altered, if needed, to conform with inner wall surface 30 of body 18. For example, lighting element 60 can be reduced in size and positioned in working channel 24 by moving lateral edges 74, 76 toward one another. Once inserted in working channel 24, edges 74, 76 can be returned toward their original configuration, if necessary, causing outer wall member 64 to contact inner wall surface 30 in frictional engagement therewith.

Lighting element 60 can be moved axially, as indicated by arrow 80 of Fig. 1, to adjust the positioning of lighting element 60 in working channel 24 while maintaining frictional engagement with the inner wall surface 30 of retractor 14. Lighting element 60 can also be rotated about inner wall surface 30, as indicated by arrow 82, to adjust the positioning of light transmitting elements 68 about working channel 24 while maintaining frictional engagement with inner wall surface 30. By providing a readily adjustable lighting element that maintains engagement with retractor 14 during adjustment, the surgeon can reposition the location and direction of the emitted light as needed without removing lighting element 60 from working channel 24, or without the risk of lighting element 60 falling into the surgical space. Other embodiments contemplate that lighting element 60 could be immovably positioned in working channel 24.

Lighting element 60 can have a shape that corresponds to the shape of working channel 24, and thus the working channel remains substantially unobstructed by lighting element 60. Surgical instruments, implants and the like can be positioned through the passage defined by inner wall member 62 while lighting element 60 remains engaged with body 18 in working channel 24 to illuminate the surgical space. Further, the radially dispersed light transmitting elements 66 provide a multitude of directions and locations

from which light can be emitted, reducing the chance of completely or substantially obstructing the emitting light during the surgical procedure.

In one particular embodiment, lighting element 60 is comprised of a pair of stainless steel plates positioned along opposite sides of light transmitting elements 68, which are provided in the form of plastic optical fibers. In another embodiment, wall members 62, 64 are comprised of opaque material to prevent passage of light therethrough so it is focused through the distal ends of light transmitting elements 66. Other embodiments contemplate lighting element 60 is made from other material, such as plastic material or other metals and metal alloys, for example. It is further contemplated that lighting element 60 could be cylindrical in shape and adapted to frictionally engage the inner wall surface of the retractor. It is also contemplated that lighting element 60 could be coupled to the proximal end of the retractor via a hook-like member, set screw, or other coupling device.

Light source 12 can be any device capable of generating and/or transmitting light to link 52. Link 52 can be any one or combination of fiber optic cables, including plastic fiber optic cables, wires or other transmission device or devices capable of transmitting light between light source 12 and retractor 14. Optical fibers can be bundled in a protective sheath.

Retractor 14 is shown as a cylindrical retractor with a circular cross-section. However, other retractor embodiments are contemplated, including retractors with non-circular cross-sections, and working channels that are not completely enclosed by body 18. Other retractor examples are provided in U.S. Patent Application Serial No. 09/815,693, filed March 23, 2001 (Attorney Docket No. 4002-2642); U.S. Patent Application Serial No. 10/117,440, filed April 25, 2002 (Attorney Docket No. 4002-2896); and U.S. Patent Application Serial No. 10/180,658, filed June 26, 2002 (Attorney Docket No. 4002-3006), each of which is incorporated herein by reference in its entirety.

While the invention has been illustrated and described in detail in the drawings and foregoing description, the same is to be considered as illustrative and not restrictive in character, it being understood that only the preferred embodiment has been shown and described and that all changes and modifications that come within the spirit of the invention are desired to be protected.

What is claimed is:

1. A surgical instrument for accessing and illuminating a space within a body of a patient, comprising:

a retractor positionable with the body of the patient and including an inner wall surface defining a working channel therealong; and

a lighting element including at least one wall member and at least one light transmitting element along said at least one wall member, said at least one wall member positionable along said inner wall surface and frictionally engageable with said inner wall surface, said frictional engagement sufficient to maintain a position of said lighting element relative to said retractor.

2. The instrument of claim 1, wherein said at least one light transmitting element includes a plurality of light transmitting elements extending along and spaced about said at least one wall member.

3. The instrument of claim 2, wherein said at least one wall member includes an inner wall member and an outer wall member, said plurality of light transmitting elements being positioned in a passage between said inner wall member and said outer wall member.

4. The instrument of claim 2, wherein said plurality of light transmitting elements comprise optical fibers.

5. The instrument of claim 1, wherein said at least one wall member is bendable to conform to said inner wall surface.

6. The instrument of claim 1, wherein said inner wall surface of said retractor substantially encloses said working channel and said at least one wall member of said lighting element extends about at least 50 percent of said inner wall surface.

7. The instrument of claim 1, wherein said lighting element is movable axially along said inner wall surface while said at least one wall member maintains frictional engagement therewith.

8. The instrument of claim 1, wherein said lighting element is movable circumferentially along said inner wall surface while said at least one wall member maintains frictional engagement therewith.

9. The instrument of claim 1, wherein said at least one wall member includes a first wall member including a convexly curved surface positionable along said inner wall surface of said retractor and a second wall member including a concavely curved wall surface opposite said convexly curved wall surface.

10. The instrument of claim 9, wherein said first and second wall members extend between opposite lateral edges.

11. The instrument of claim 10, wherein said first and second wall members are coupled to one another along said opposite lateral edges.

12. The instrument of claim 10, wherein said first and second wall members extend along more than 50 percent of said inner wall surface between said opposite lateral edges.

13. The instrument of claim 10, wherein said first and second wall members are comprised of opaque material.

14. The instrument of claim 9, wherein said concavely curved wall surface forms a passage that parallels said working channel.

15. The instrument of claim 1, wherein said retractor is a tube.

16. A surgical lighting instrument, comprising:


a lighting element including a pair of wall members and at least one light transmitting element between said pair of wall members, said pair of wall members forming a concavely curved inner wall surface of said lighting element and an opposite convexly curved outer wall surface of said lighting element, wall members being bendable to conform to a passage in which said lighting element is positioned.

17. The instrument of claim 16, wherein said pair of wall members extend between opposite lateral edges.

18. The instrument of claim 17, wherein said pair of wall members form a semi-circular shape between said opposite lateral edges.

19. The instrument of claim 16, wherein said at least one light transmitting element includes a plurality of light transmitting elements extending along and spaced between said pair of wall members.

20. The instrument of claim 19, wherein said plurality of light transmitting elements are positioned in a passage between said pair of wall members.

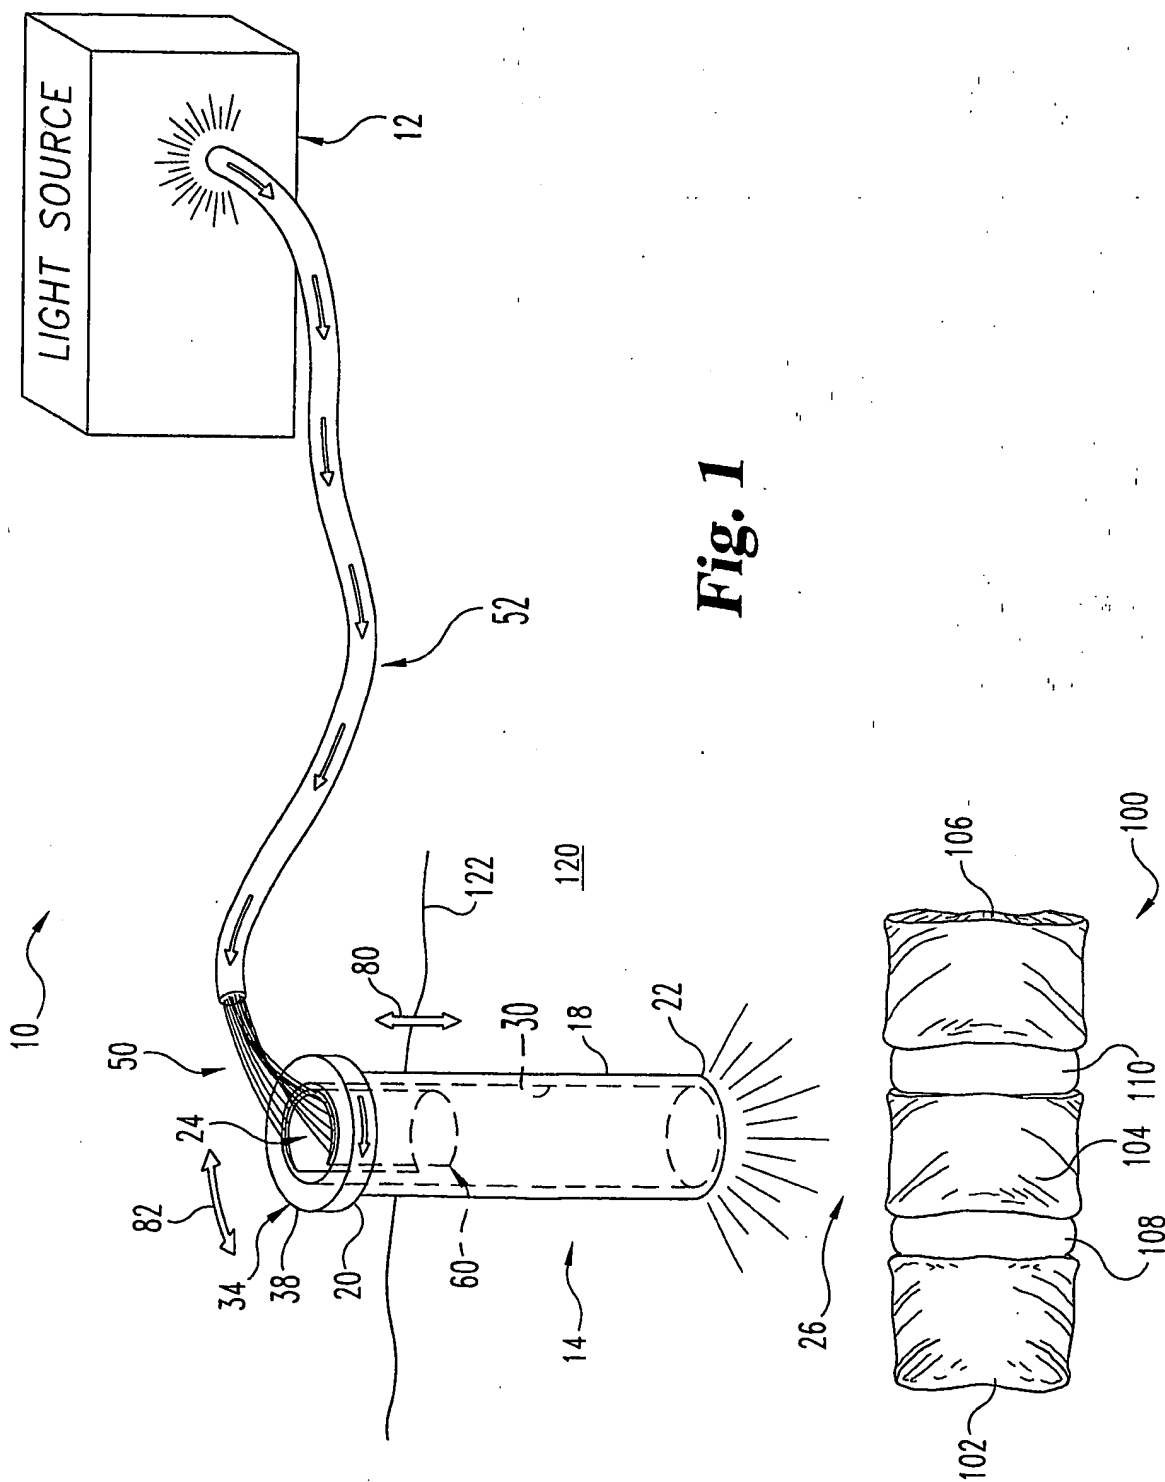

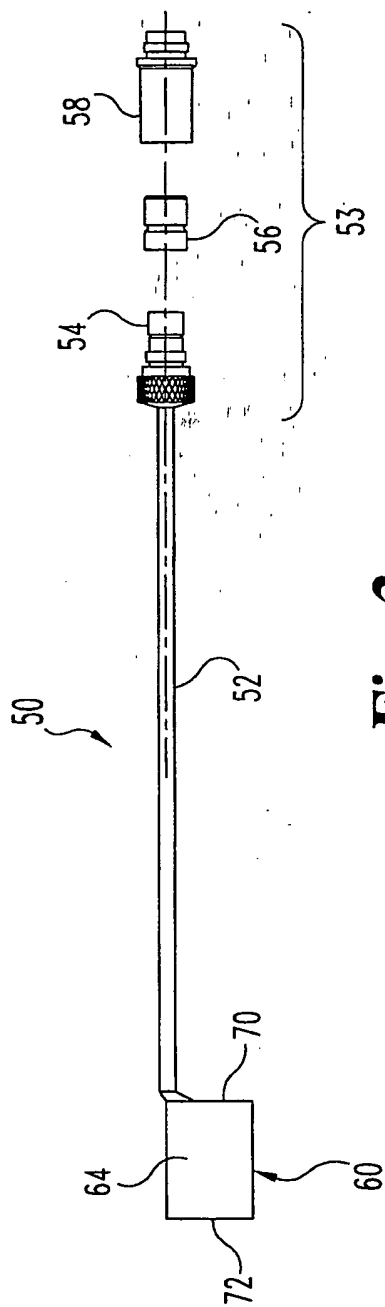


Fig. 2

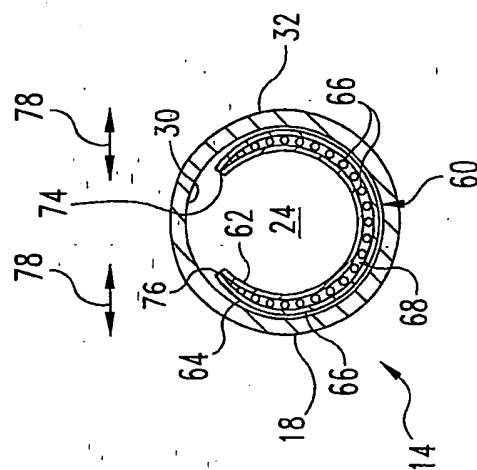


Fig. 4

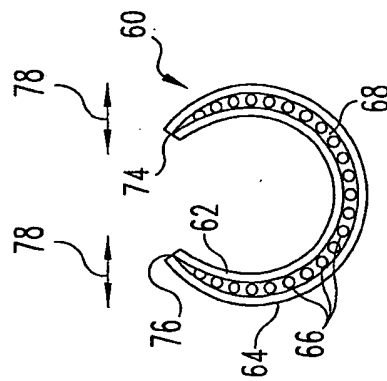


Fig. 3

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 February 2004 (12.02.2004)


PCT

(10) International Publication Number
WO 2004/012617 A3

- (51) International Patent Classification⁷: **A61B 1/00**, 19/00, 17/02
- (21) International Application Number: **PCT/US2003/023770**
- (22) International Filing Date: **30 July 2003 (30.07.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/400,562 **2 August 2002 (02.08.2002)** **US**
- (71) Applicant: **SDGI HOLDINGS, INC.** [US/US]; 300 Delaware Avenue Suite 508, Wilmington, DE 19801 (US).
- (72) Inventors: **BRANCH, Charles, L.**; 177 Plantation Lan2, P. O. Box 320, Advance, NC 27006 (US). **SMITH, Maurice, M.**; 9285 Oak Knoll Cove, Cordova, TN 38018 (US). **FOLEY, Kevin, T.**; 2877 Keasler Circle West, Germantown, TN 38139 (US). **ROEHM, Thomas, E. II**; P.O. Box 1372, Braden, TN 38010 (US).
- (74) Agents: **WARMBOLD, David, A.** et al.; MS LC340, 710 Medtronic Parkway NE, Minneapolis, MN 55432 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *with international search report*
— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

[Continued on next page]

(54) Title: **SYSTEMS AND TECHNIQUES FOR ILLUMINATING A SURGICAL SPACE**

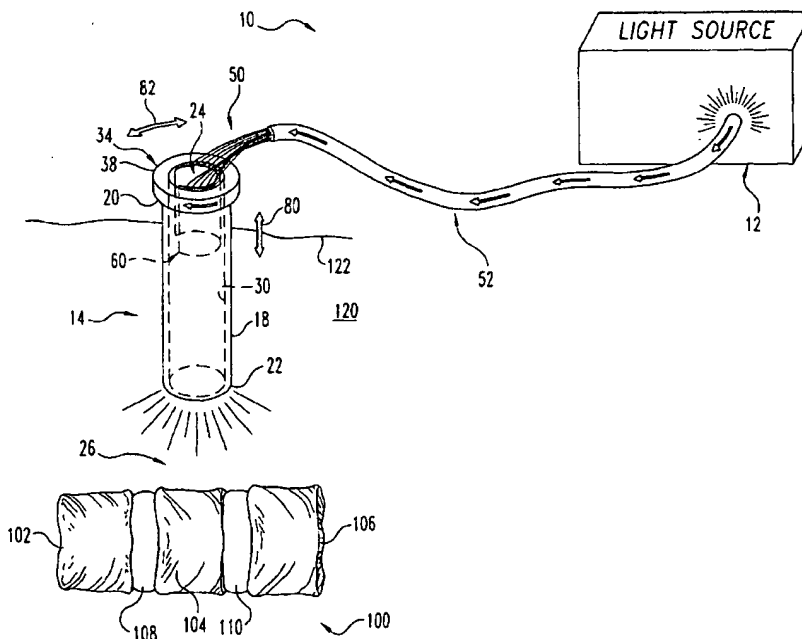

(57) Abstract: Methods and devices for illuminating a surgical space during surgery in a patient are provided. A retractor provides a working path for access to a location in the patient. A light instrument (50) is positionable in working channel (24) to emit light at the surgical space without substantially obstructing access to the surgical space.



(88) Date of publication of the international search report:
8 July 2004

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/23770

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61B1/00 A61B19/00 A61B17/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 139 493 A (KOROS TIBOR B ET AL) 31 October 2000 (2000-10-31)	1,4,7
Y	column 6, line 41 - line 67 column 7, line 19 - line 43 figures 3,4,6	2,3
Y	US 4 562 832 A (WILDER JOSEPH R ET AL) 7 January 1986 (1986-01-07)	2,3
A	column 8, line 16 - line 41 column 9, line 3 - line 40 figures 4,5	1
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

18 May 2004

Date of mailing of the international search report

04/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Nistor, L

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 03/23770

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	GB 2,133,694 A (HERAEUS GMBH W C) 1 August 1984 (1984-08-01) page 2, line 9 - line 33 figure 2	1
X	US 4 907 132 A (PARKER JEFFREY R) 6 March 1990 (1990-03-06) column 4, line 8 - line 65 column 5, line 42 - column 6, line 6 column 7, line 63 - line 68 figures 1-3,10-12	16-20
X	US 2002/080248 A1 (ADAIR EDWIN L ET AL) 27 June 2002 (2002-06-27) page 5, paragraph 49 figure 1B	16,19,20
Y A	US 4 597 030 A (BRODY GARRY S ET AL) 24 June 1986 (1986-06-24) column 1, line 34 - column 2, line 7 column 3, line 23 - column 5, line 11 figures	16-20
Y	US 6 427 034 B1 (MEIS MICHAEL ALAN ET AL) 30 July 2002 (2002-07-30) column 2, line 13 - line 15 column 2, line 25 - line 32 column 3, line 15 - line 37 column 7, line 45 - column 8, line 9 column 8, line 24 - line 46 figures	16-20

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 03/23770

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6139493	A	31-10-2000	US 5928139 A	27-07-1999
US 4562832	A	07-01-1986	US 4605990 A	12-08-1986
GB 2133694	A	01-08-1984	DE 3301890 A1	26-07-1984
			JP 1745896 C	25-03-1993
			JP 4018860 B	27-03-1992
			JP 59141938 A	14-08-1984
US 4907132	A	06-03-1990	US 4885663 A	05-12-1989
			AT 114362 T	15-12-1994
			AU 650965 B2	07-07-1994
			AU 1508892 A	25-06-1992
			AU 619591 B2	30-01-1992
			AU 4126189 A	15-03-1990
			CA 1318645 C	01-06-1993
			DE 68919456 D1	05-01-1995
			EP 0359450 A2	21-03-1990
			JP 2135302 A	24-05-1990
			JP 2823893 B2	11-11-1998
			US 5042900 A	27-08-1991
US 2002080248	A1	27-06-2002	US 6310642 B1	30-10-2001
			US 5986693 A	16-11-1999
			US 6316215 B1	13-11-2001
			CA 2345811 A1	08-02-2001
			EP 1117324 A1	25-07-2001
			WO 0108549 A1	08-02-2001
			WO 03015619 A1	27-02-2003
			WO 03030525 A1	10-04-2003
			US 2001052930 A1	20-12-2001
			CA 2301714 A1	15-04-1999
			EP 1029356 A1	23-08-2000
			JP 2001519610 T	23-10-2001
			WO 9918613 A1	15-04-1999
US 4597030	A	24-06-1986	NONE	
US 6427034	B1	30-07-2002	US 5902435 A	11-05-1999
			CA 2274568 A1	09-07-1998
			DE 69723867 D1	04-09-2003
			EP 1202094 A1	02-05-2002
			EP 0950203 A1	20-10-1999
			JP 2001507813 T	12-06-2001
			WO 9829771 A1	09-07-1998

THIS PAGE BLANK (USPTO)